




LUMiNODE SDM-DIG-C

Ordering code: LMNDIGC

The LUMiNODE SDM-DIG-C allows you to control a DALI DT8 driver over powerline. It supports color control (RGB) as well as tunable white. Full color scene controls is available.

Features

- ✓ Two-way powerline communication QM-50-SSI3
- ✓ Control color temperature and RGB scenes
- ✓ Possibility to record up to 15 preset colour scenes

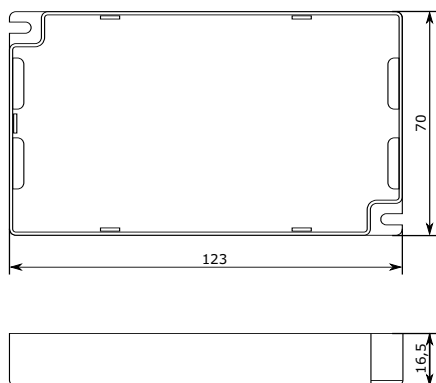

Parameter	Value
Input voltage	AC 220 V ~ 240 V; 50 Hz
Consumption	0,5 W
Communication interface	2-way powerline QM-50-SSI3
Output	2-way DALI for one slave
Protection class	II.
IP rating	IP20, optional - IP65
Dimensions (LxWxH)	123x70x16,5 mm
Weight	196 g
Operating ambient temperature	-40 °C ~ +75 °C
Case temperature	+80 °C
Max. wire size	0,2-0,75 mm ² solid/stranded
Compliance with	EN 61 347-1, EN 61 347-2-11, EN 55 015, EN 61 000-3-2, EN 61 547, EN 61 000-3-3