





## LUMiNODE NEMA7

Ordering code: LMNNEMA7

The LUMiNODE NEMA7 module is designed for two-way communication of luminaires with a DALI bus driver and the control unit over the powerline. The module acts as converter between the QM-50 and DALI protocols.

### Features

- ✓ Two-way powerline communication QM-50-SSI3
- ✓ Lighting control in real time
- ✓ Autonomous lighting control
- ✓ Ability to mass upload a new schedule in groups
- ✓ Regulation from 0 to 100%
- ✓ Both output buses are galvanically isolated from the input

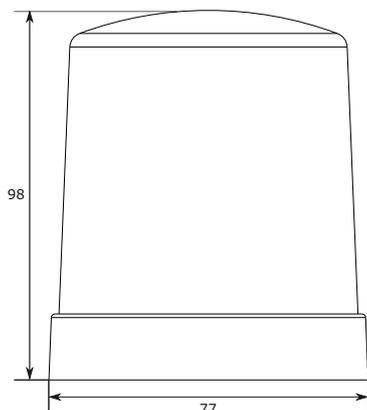

| Parameter                     | Value                      |
|-------------------------------|----------------------------|
| Input voltage                 | AC 220 V ~ 240 V; 50 Hz    |
| Consumption                   | 0,5 W                      |
| Communication interface       | 2-way powerline QM-50-SSI3 |
| Input/Output                  | DALI                       |
| Protection class              | II.                        |
| IP rating                     | IP66                       |
| Operating ambient temperature | -30 °C ~ +75 °C            |
| Dimensions                    | 98x77 mm                   |
| Weight                        | 180 g                      |