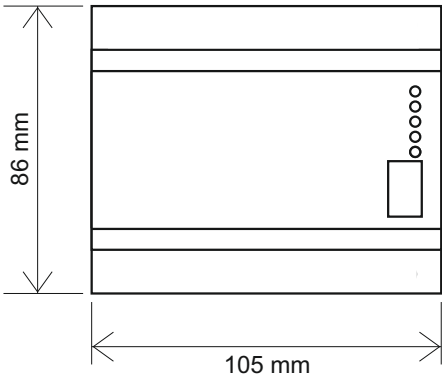# SEAK
LIGHTING CONTROL & ENERGY EFFICIENCY MANAGER

Control unit DQ-64

Ordering code: DQ64100

Features

✔ Communication with 4 IEC62386 Interface (DALI) lines
✔ Every IEC62386 Interface line controls a max. of 64 luminaries
✔ Communication with the controller through RS485 interface
✔ One RS485 bus can serve up to 31 DQ64 units
✔ RS485 interface has surge protection
✔ RS485 and IEC62386 interfaces are galvanically isolated

Parameter	Value
Input voltage	DC 5 V
Consumption	4 W
Communication interface	RS485 (9600bps), IEC62386 Interface (1200bps)
Operating ambient temperature	-20 °C to +70 °C
IP Rating	IP20
Dimensions (LxWxH)	105x86x57mm (5M)
Weight	183g

86 mm

105 mm

57 mm

www.seakenergetics.com

Specifications subject to change without notice   DSDQ64040521