



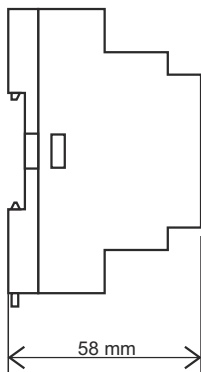

## Current loops interface MPS-04

### Features

- ✓ Selectable own address (1 to 31)
- ✓ Inputs, outputs and RS485 to each other galvanically separated
- ✓ Surge protection RS485
- ✓ RS485 interface with two gates
- ✓ Power on indication

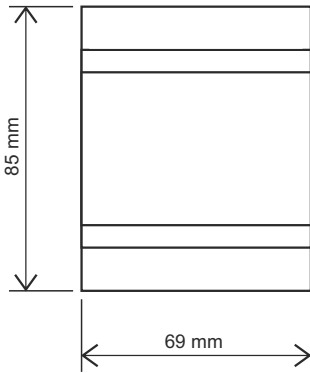

Parameter	Value
Input voltage	DC 24 V
Consumption	0,2 W
Power of RS485	12 - 35 V
Input/Output	4x input (0 to 20 mA DC galvanically separated) 4x output (0 to 20 mA DC galvanically separated)
Operating ambient temperature	-20 °C to +70 °C
IP Rating	IP20
Dimensions (LxWxH)	69x58x86 mm
Weight	122 g