

# PARGADE 35

Harsh environments LED luminaire

# SEAK




## CHARACTERISTICS

Parameter	Value
Name	PARGADE 35
Input Power	35 W
Input Voltage	220 - 240 VAC, 50 Hz
Luminous Efficacy at tp	157 lm/W
Luminous Flux at tp	5495 lm
Typical Ambient Temperature	25 °C
Power Supply Producer	OSRAM
Dimmable	DALI
LED Light Engine	OSRAM PrevalLed
Optical System	94% difuser
Correlated Colour Temperature	4100K ± 4%
Colour Rendering Index	>82
Operating temperature LED	-35 °C to +85 °C
Operating temperature power supply	-25 °C to +50 °C
IP Rating	IP65
Lumen Maintenance L70B50	>70 000 hours
Housing Colour	Grey
Material	Sabic LEXAN
Mounting	Surface/Pendant
M.O.L.	1262 mm (48")
Weight	2142 g
Warranty	Five years warranty

PARGADE 35 saves money by reducing electricity consumption up to 50%. Lower cost of lighting will increase your profits, thanks to maintenance-free.

PARGADE 35 provides effective lighting for production halls, warehouses, logistic centers and petrol stations. Appropriate solution wherever is required high quality lighting and a higher ingress protection.

## DIMENSIONS

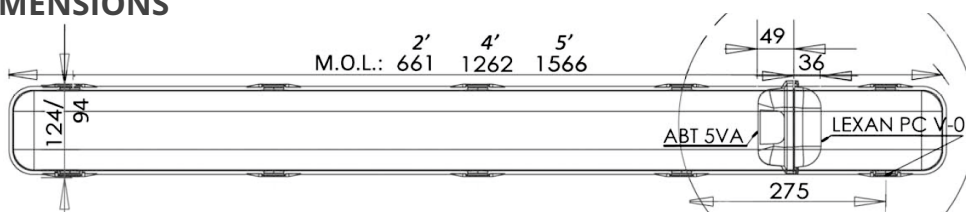

Specifications subject to change without notice

DSPAR35TESEN140716PM