

# DIM BAR SDM W-10

Powerline controllable and reprogrammable dimmer for LED drivers

Ordering code: SDM-W10




## General description

The DIM BAR is an LED driver control device which provides high energy savings at low investment, installation and maintenance efforts. Is designed for standard LED PWM dimmable drivers delivering features for dimming, based on user predefined dimming sequence. The DIM BAR is programmable via powerline communication.

## Application


The DIM BAR is designed for mounting inside luminaires in various lighting applications such as parks, residential areas, streets, roads, highways, parking lots, ports and others. It is compatible with most of standard LED PWM dimmable drivers and is also suitable for industrial lighting.

## Programming

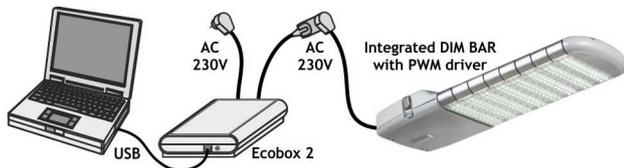


The DIM BAR programming can be done by using the Ecostream 2 software and the powerline master controller Ecobox 2 which is connected to a PC via USB connection. Ecobox 2 modulates encoded instructions into the supplying mains.

The DIM BAR then demodulates the signal, performs the decoded instruction and stores the dimming sequence into its memory. A successful programming will be indicated by fluctuating amplitude of PWM signal with a period of 1 second.

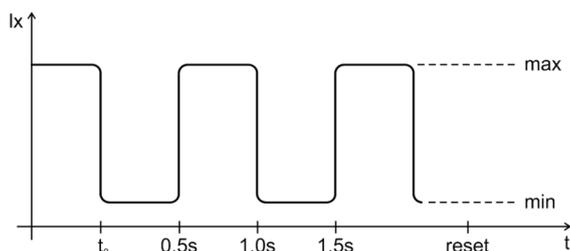

## Wiring diagram

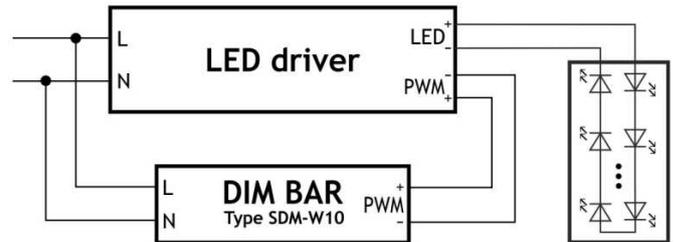


## Characteristic

The DIM BAR can operate in two basic modes A & B and one additional mode C.

A. the DIM BAR receives instructions via powerlines and adjusts PWM control signal in real time.

B. the DIM BAR dims lighting according to a sequence saved in its memory.

C. the DIM BAR is programmed with a sequence via powerlines as an additional function.

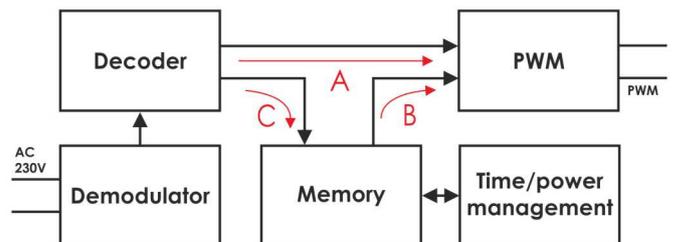

The DIM BAR does not contain a real-time clock, it has an interval counter.


In case of stand-alone operation, the dimming sequence is based on a middle point calculation of lighting duration from ON to OFF. The middle point is also adjusted based on time difference of the selected country of use. It is calculated after the first operation, and then checks the consistency of two previous operations for adaptation.

Function A is superior to function B. If the device receives an instruction through the supply line, mode B turns off.

# DIM BAR SDM W-10


Powerline controllable and reprogrammable dimmer for LED drivers

## Programming software

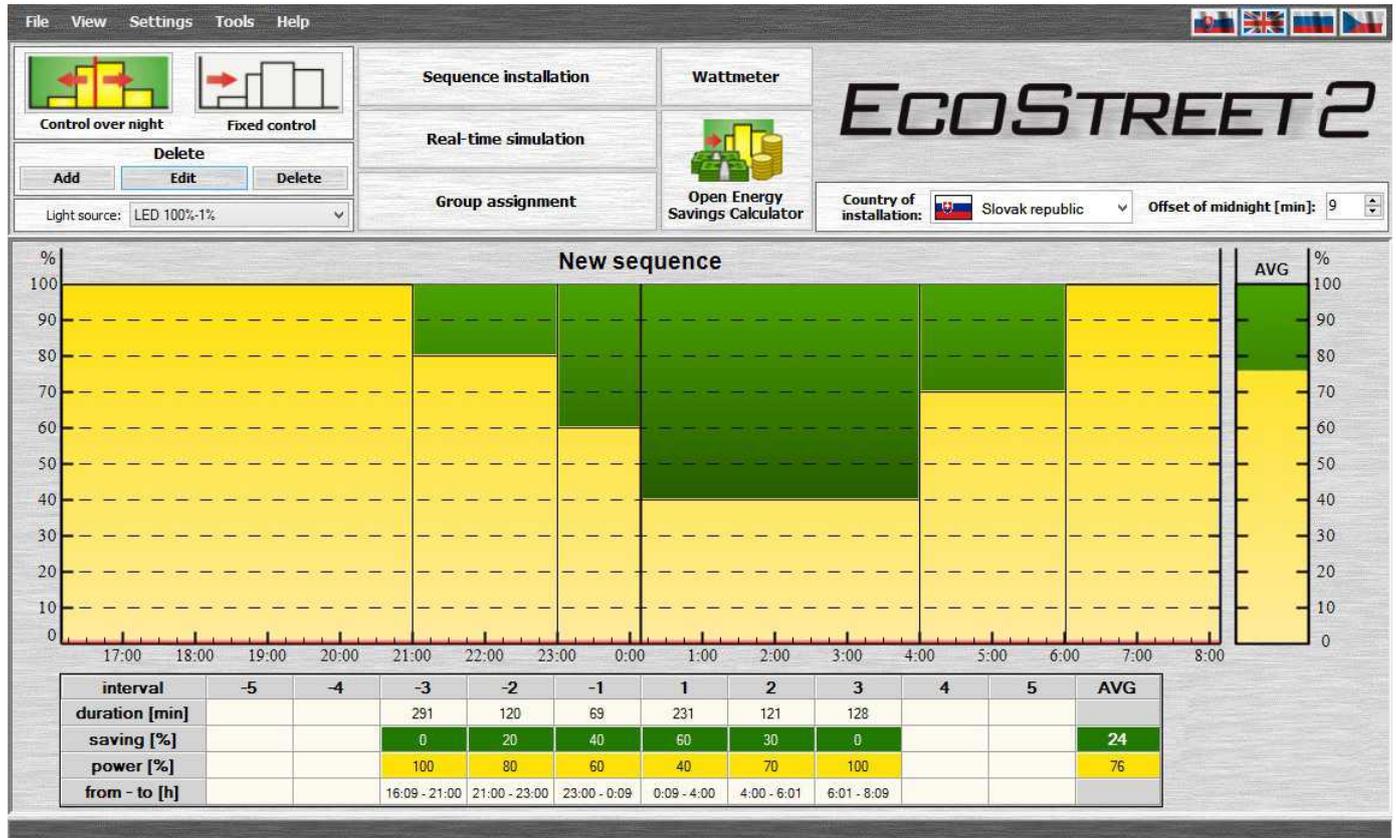

The programming software EcoStreet 2 enables creating sequences, which are then installed into DIM BAR devices by using the powerline master Ecobox 2 connected to a PC. It also features an energy savings calculator for predicting savings for a selected period with a display of sunrise and sunset according to an integrated calendar. The sequence can contain up to 10 intensity changes in the range of 0 - 100%.

## Technical specifications

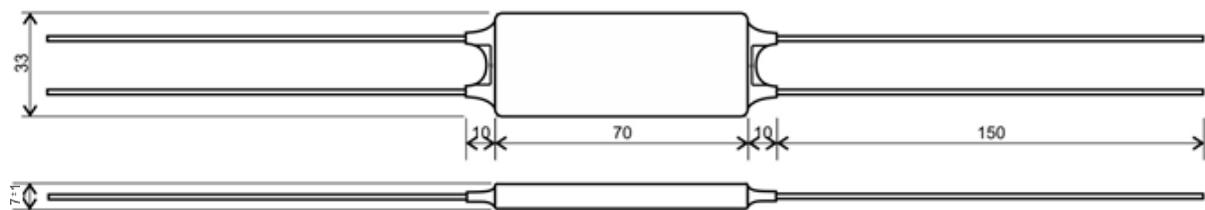

Input voltage	100-240V AC	Ambient temperature	-40 ~ +75°C
Frequency	50Hz	Case temperature	+80°C
Consumption	0.70W	Degree of protection	IP54
Re-programmable	Yes	Weight	20g
Communication	SSI-50 Powerline	Country of origin	Slovak Republic
Output	PWM	Standards	EN 61 347-1, EN 61 347-2-11 EN 55 015, EN 61 000-3-2 EN 61 547
Wire specification	Solid, 0.5mm <sup>2</sup>		
Installation	Inside or outside of luminaire with suitable IP protection	Notes: to use SDM-W10 with 1-10V drivers, check for compatibility with the driver's vendor	